


Series
VENTS Boost 200 EC

Series
VENTS Boost 355-400 EC

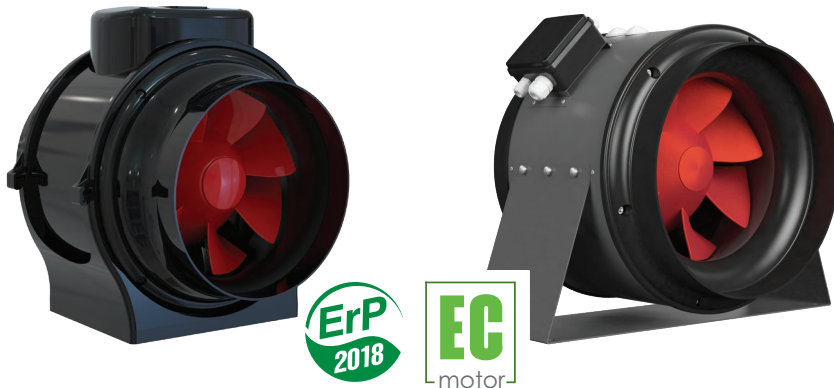

Inline fans in a polymer casing with the air flow of up to **5700 m³/h**

■ **Application**

Inline fans for supply and extract ventilation of various commercial and industrial premises requiring powerful air flow. The fans are compatible with Ø 200, 355 and 400 mm air ducts.

■ **Design**

The casing is made of polymer (for models 315, 355 and 400, the casing is additionally reinforced with a metal housing). Due to the conically-shaped polymer impeller with specially profiled blades the air stream circular velocity increases, which results in higher air

flow and pressure as compared to characteristics of standard axial fans.

The specially designed diffuser, impeller and airflow rectifier at the fan outlet provide smooth air flow distribution and enable the best combination of high air flow, increased pressure and low noise. The fan casing is equipped with an airtight terminal box for connection to power mains.

■ **Motor**

The units are equipped with highly efficient electronically commutated DC motors.

These state-of-the-art motors are the most advanced solution in energy efficiency today. EC motors are characterised with high performance and optimum control across the entire speed range. In addition to that, the efficiency of the electronically commutated motor reaches very impressive levels of up to 90 %.

■ **Speed control**

The fan is controlled using a 0-10 V control signal. When the control signal value changes, the EC fan changes its rotation speed and provides air flow required for the ventilation system. Several fans can be integrated into a single computer-driven control system. Custom designed software provides high accuracy control of the fans integrated into a network. The computer display shows all the system parameters and the operation mode can be set individually for each fan in the network.


■ **Mounting**

The fans can be mounted at any place and at any angle within the ductwork system. Several fans can be installed in one system in parallel to attain higher air flow or in series to increase operating pressure in the system. The fan casing is equipped with fixing brackets for floor, wall or ceiling mounting.

The fans can be mounted using KM-Boost brackets of the appropriate size (purchased separately, available for 315, 355 and 400 models).


Overall dimensions

Model	Dimensions [mm]			
	A	Ø D	D1	H
Boost 200 EC	302	198.5	293	308
Boost 315 EC S	388	313	390	450
Boost 355 EC Boost 355 EC S	388	350	390	450
Boost 400 EC	388	395	441	500

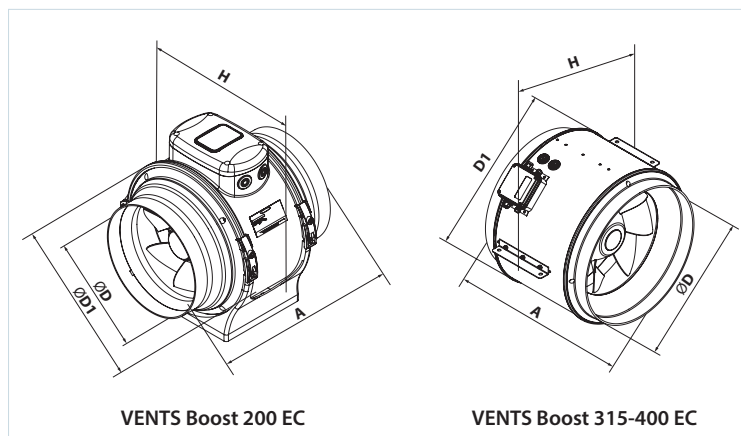

Overall dimensions of brackets



Model	Dimensions [mm]				
	A	A1	H	H1	B
KM-Boost 355	506	567	213	204	180
KM-Boost 400	563	624	235	228	180

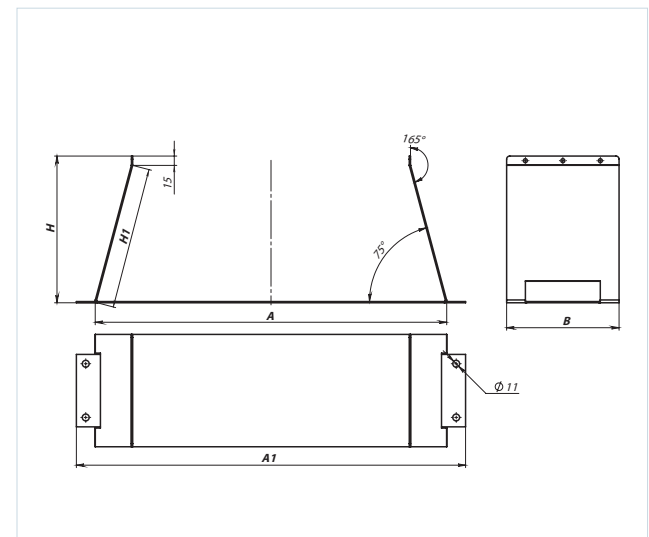

Technical data



	Boost 200 EC	Boost 315 EC S
Voltage [V]	1~220-240	1~220-240
Frequency [Hz]	50/60	50
Power [W]	121	353
Current [A]	0.96	1.56
Maximum air flow [m³/h]	1250	3250
Maximum air flow [l/s]	347	903
RPM [min ⁻¹]	3110	2424
Sound pressure level at 3 m distance [dBA]	50	55
Maximum transported air temperature [°C]	-25...+55	-25...+55
Protection rating	IPX4	IPX4
Motor protection rating	IP44	IP44

VENTS Boost EC
FAN SERIES

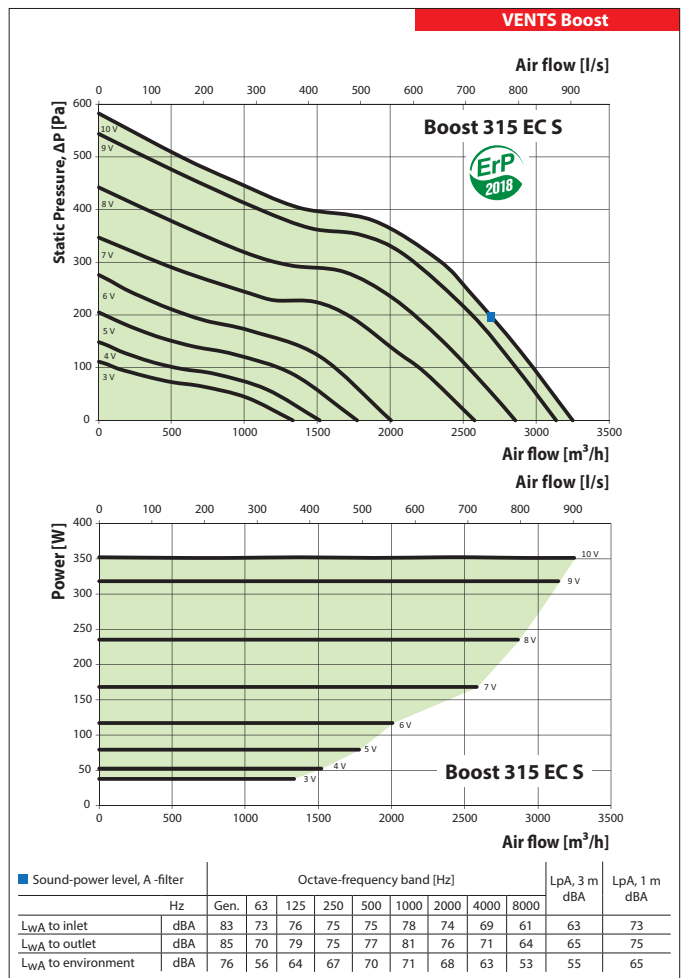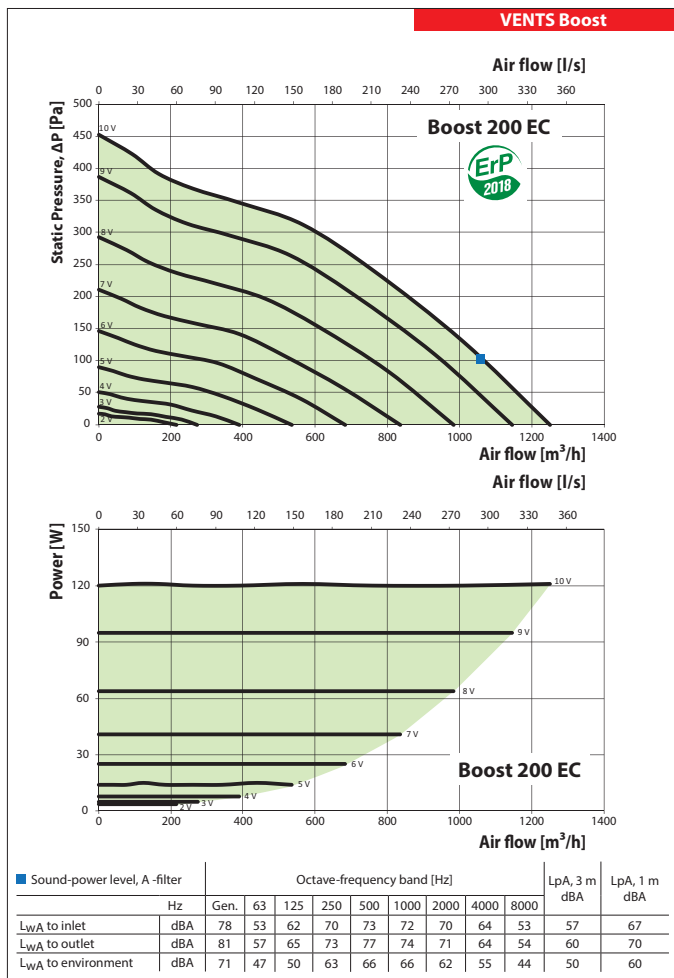

Technical data

	Boost 355 EC	Boost 355 EC S
Voltage [V]	1~230	1~230
Frequency [Hz]	50	50
Power [W]	353	701
Current [A]	1.56	3.10
Maximum air flow [m³/h]	3685	4630
Maximum air flow [l/s]	1024	1286
RPM [min ⁻¹]	2470	3175
Sound pressure level at 3 m distance [dBA]	55	60
Maximum transported air temperature [°C]	-25...+55	-25...+55
Protection rating	IPX4	IPX4
Motor protection rating	IP44	IP44

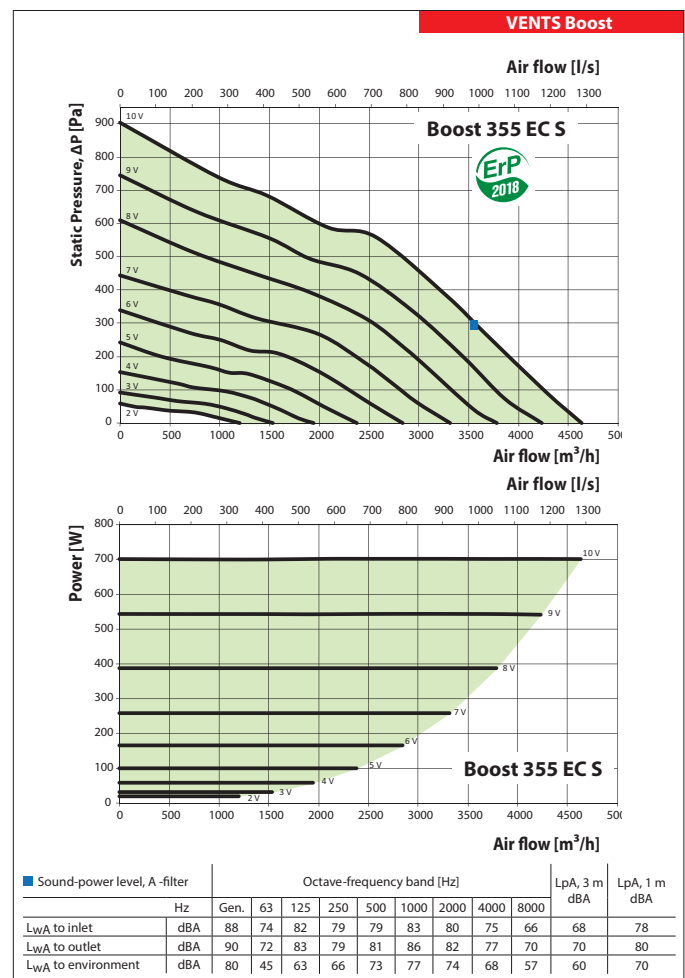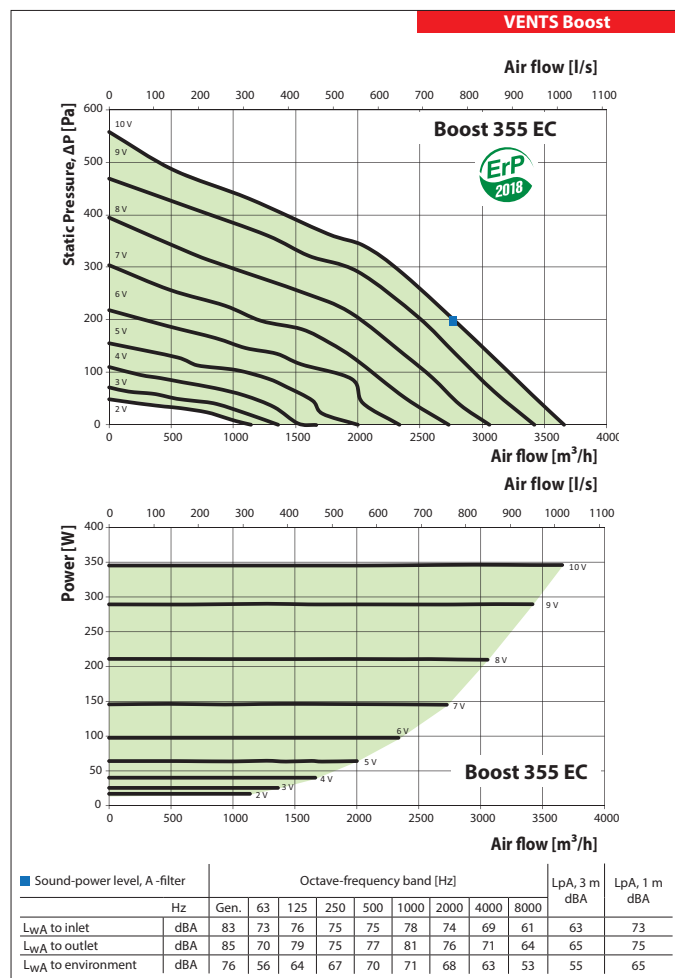

Technical data

	Boost 400 EC
Voltage [V]	1~230
Frequency [Hz]	50
Power [W]	726
Current [A]	3.23
Maximum air flow [m³/h]	5700
Maximum air flow [l/s]	1583
RPM [min ⁻¹]	2580
Sound pressure level at 3 m distance [dBA]	60
Maximum transported air temperature [°C]	-25...+55
Protection rating	IPX4
Motor protection rating	IP44

VENTS Boost EC
FAN SERIES

