

BOX BSTB



BELT DRIVEN BACKWARD CENTRIFUGAL IN SOUNDPROOF CABINET 400°C/2H

MANUFACTURING FEATURES:

- BSTB range fans assembled in soundproof cabinets with insulated panels.
- Fan assembled on antivibration mountings.
- Simple inlet, backward impeller with self-cleaning system.
- Supplied with motor, pulleys and belts.
- Gland connection included.
- Standard asynchronous squirrel-cage motor with IP-55 protection and Class F insulation. Manufactured with standard voltages: 230/400V 50Hz in three phase motors up to 4kW and 400/690V 50Hz for higher powers.

APPLICATIONS:

Designed for inline installation, indoor or outdoor assembly, they are suitable for:


- Air renewal in buildings and industries.
- Smoke emergency exhaust with motor outside the hazardous area (400°C/2h certified).
- Industrial and professional kitchen hoods.
- Maximum working temperature: carried air 130°C; environment 60°C.

UNDER REQUEST:

- Special voltages.
- 2 speed motors.
- Orientation:
 - LG90 (horizontal).
 - LG0 (vertical outlet).
- Sandwich insulation.

Official homologation by the European laboratory APPLUS according to EN 12101-3:2015
 Certification Nr: 0370-CPR-1371

Accessories



AVR AVS BA-400 INT



JE 45 SFC

Technical data

Three-phase motor


Code	Model	Angle	Min. Rated power kW	Max. Rated power kW	Max. Airflow m ³ /h	Sound db (A)**	Weight kg	Connect. diagram
	BOX BSTB 355	1300 - 2900	0,37	3,00	6.980	68	103	1
	BOX BSTB 400	1200 - 2800	0,55	4,00	8.710	74	139	1
	BOX BSTB 450	1200 - 2800	0,75	7,50	12.990	79	167	1
	BOX BSTB 500	900 - 2500	1,10	7,50	14.300	78	194	1
	BOX BSTB 560	800 - 2200	1,50	11,00	19.110	79	222	1
	BOX BSTB 630	800 - 1900	2,20	15,00	24.170	78	262	1
	BOX BSTB 710	600 - 1800	3,00	18,50	29.390	79	296	1

Notes:

* The motor is not included in fan weight

** Total sound pressure level at the point of maximum flow measured in dB(A) in the suction measured in free field at a distance of 6m from the source


Dimensions

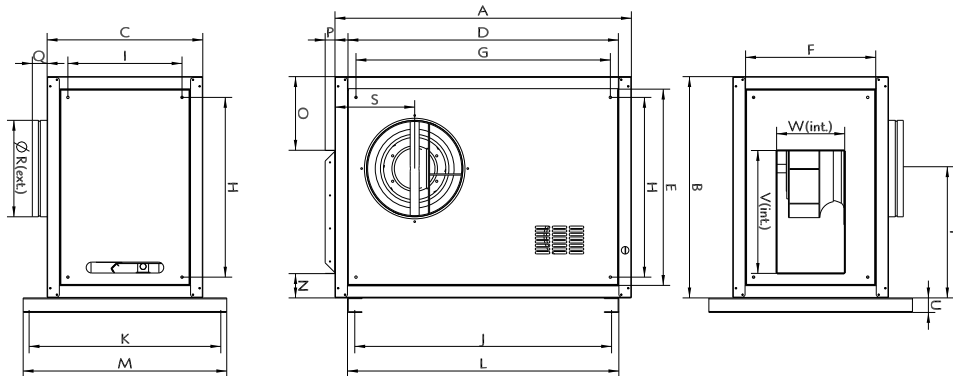

Model	A	B	C	D	E	F	G	H	I
BOX BSTB 355	1068	824	612	960,5	721	506	894,5	652,5	440
BOX BSTB 400	1223	913	642	1117	809	536	1049,5	741,5	471
BOX BSTB 450	1323	1003	692	1215,7	900	587	1149,5	831,5	521
BOX BSTB 500	1423	1100	732	1315,7	997	627	1249,5	928,5	561

Model	J	K	L	M	N	O	P	Q	S
BOX BSTB 355	904,5	760	964,5	809	101	268	40,5	60	307
BOX BSTB 400	1059,5	791	1119,5	840	100	304	40,5	60	329
BOX BSTB 450	1159,5	841	1219,5	890	100	328	40,5	60	375
BOX BSTB 500	1259,5	881	1319,5	930	104	355	40,5	60	399

Model	T	U	V	W	ØR
BOX BSTB 355	485,7	60	453	253	353
BOX BSTB 400	533,7	60	507	281	398
BOX BSTB 450	587,7	60	573	310	448
BOX BSTB 500	643,7	60	639	341	498

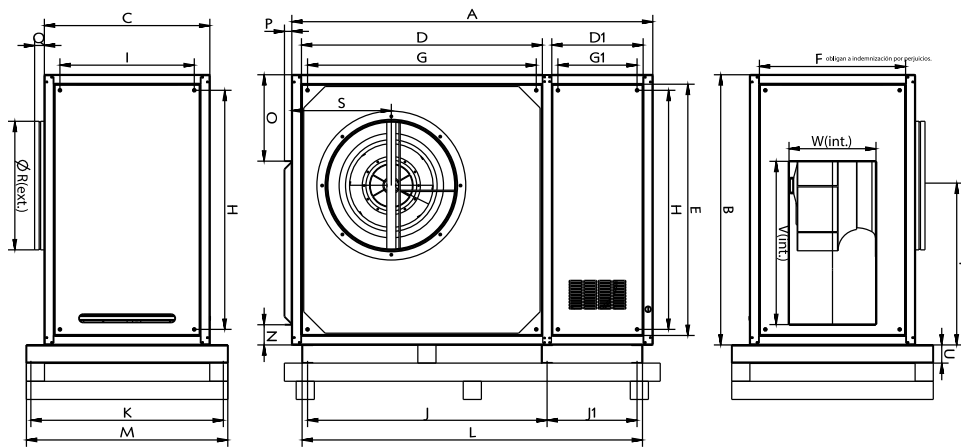

Model	A	B	C	D	D1	E	F	G	G1
BOX BSTB 560	1691,5	1216	801,3	1071	461,3	1112,8	696	1004,4	394,6
BOX BSTB 630	1821,5	1343	851	1204,5	458,8	1238,7	745	1137,4	391,6
BOX BSTB 710	1988	1488	912	1326,8	503	1383,7	805	1259,7	435,9


Model	H	I	J	J1	K	L	M	N	O
BOX BSTB 560	1044,7	630	1064	454	950	1578	999	111	387,8
BOX BSTB 630	1171,7	680	1197	451	1000	1708	1049	110	430
BOX BSTB 710	1316,7	740	1319	495,5	1060	1874,5	1109	111	475,8

Model	P	Q	S	T	U	V	W	ØR
BOX BSTB 560	40,5	60	511	715	100	715	383	558
BOX BSTB 630	40,5	60	523	790	100	801	426	628
BOX BSTB 710	40,5	60	545	878	100	899	479	708


Wiring diagram

Wiring diagram Nº 1

230/400V

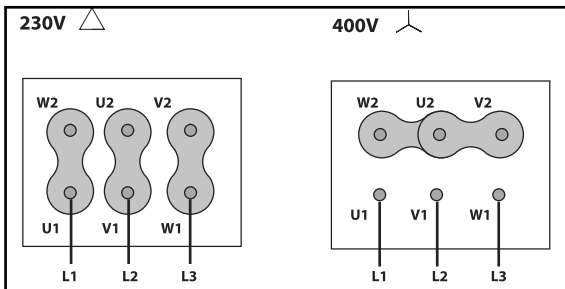


400/690V

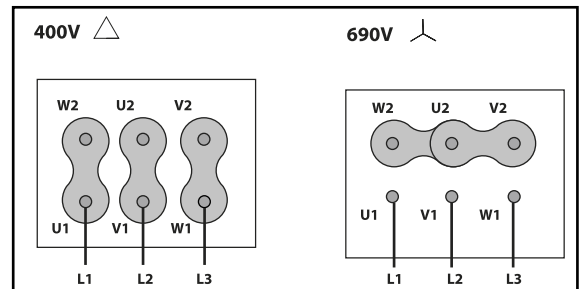


CHARACTERISTIC CURVE

BOX BSTB 355

AIR FLOW - PRESSURE

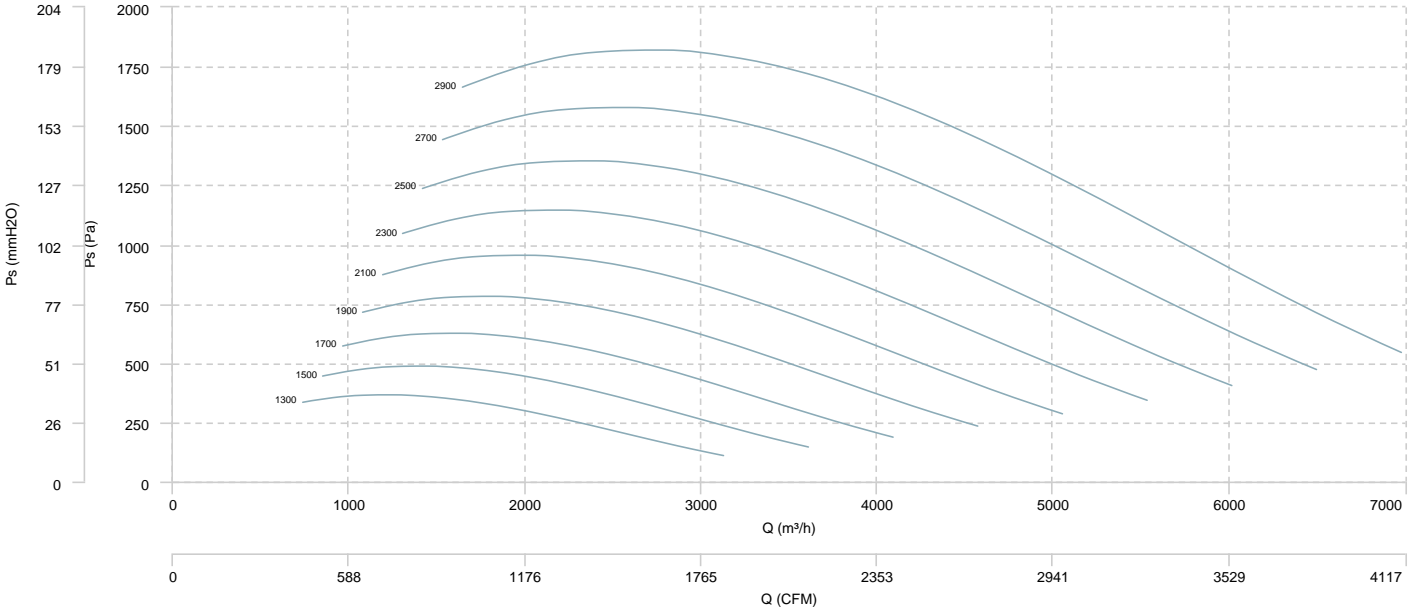


AIR FLOW - MECHANICAL POWER

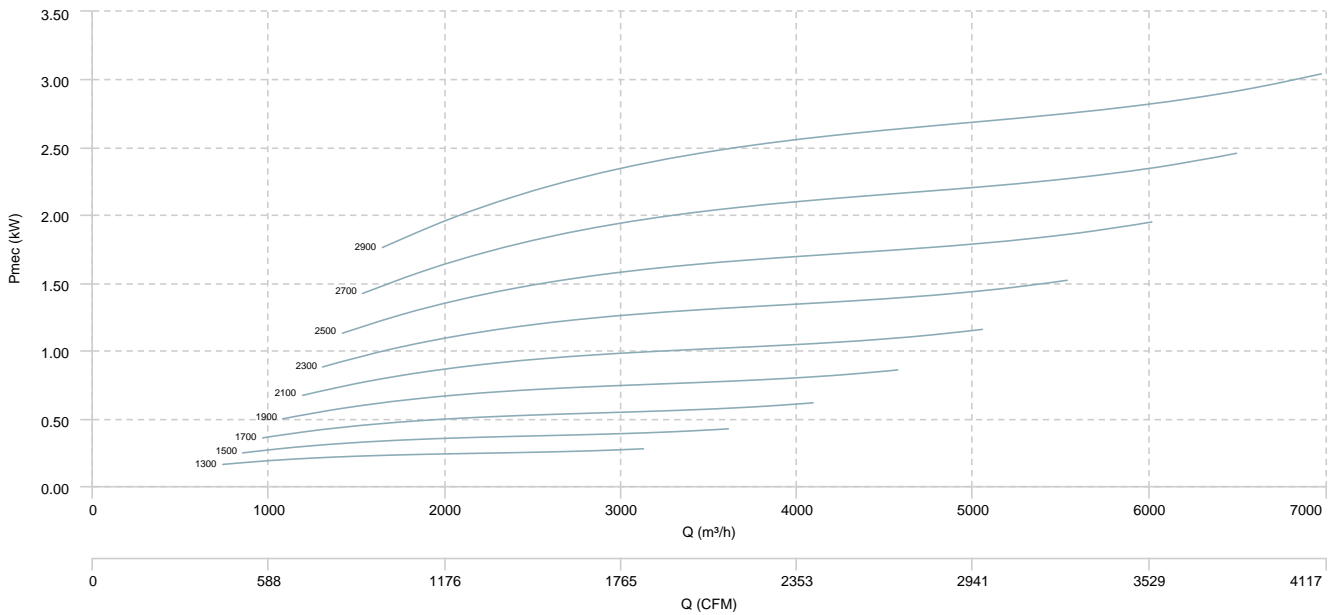


BOX BSTB 400

AIR FLOW - PRESSURE

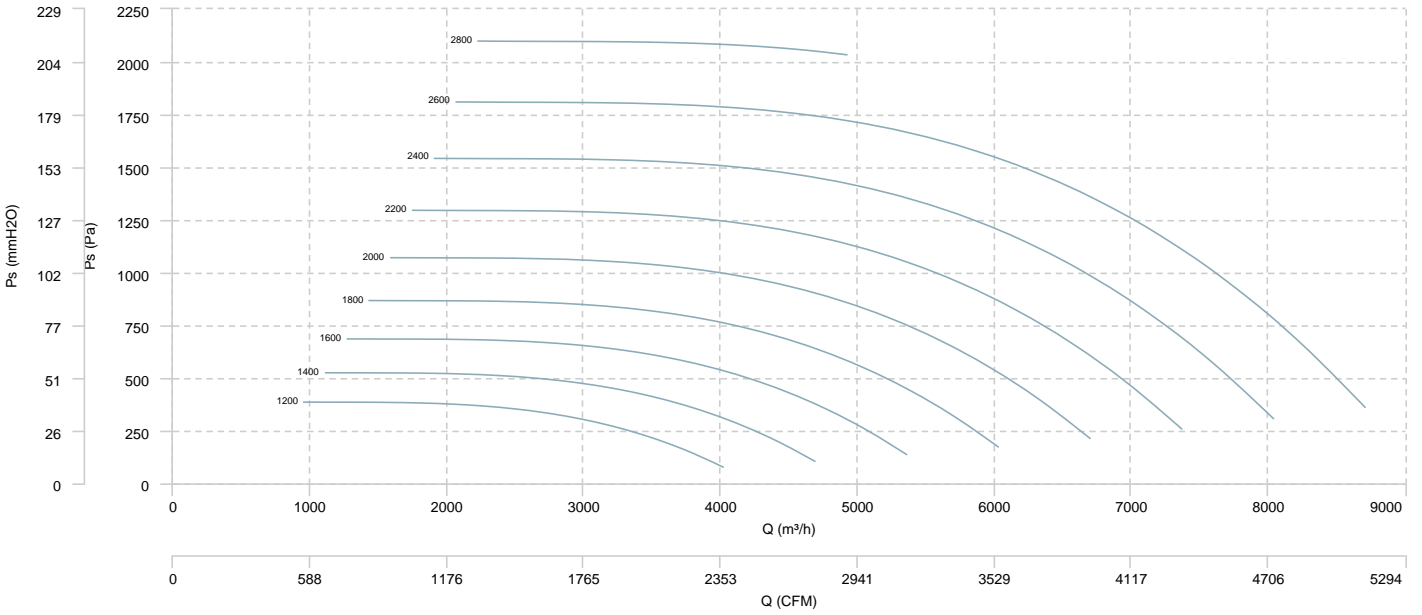


AIR FLOW - MECHANICAL POWER

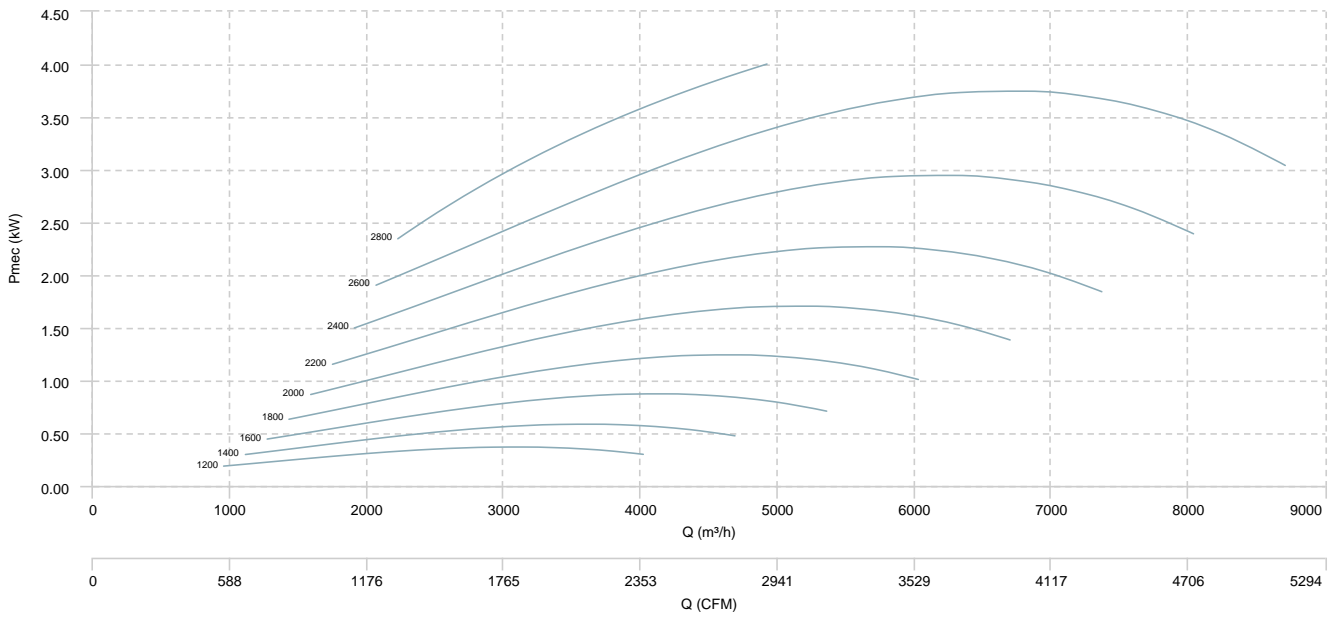


BOX BSTB 450

AIR FLOW - PRESSURE

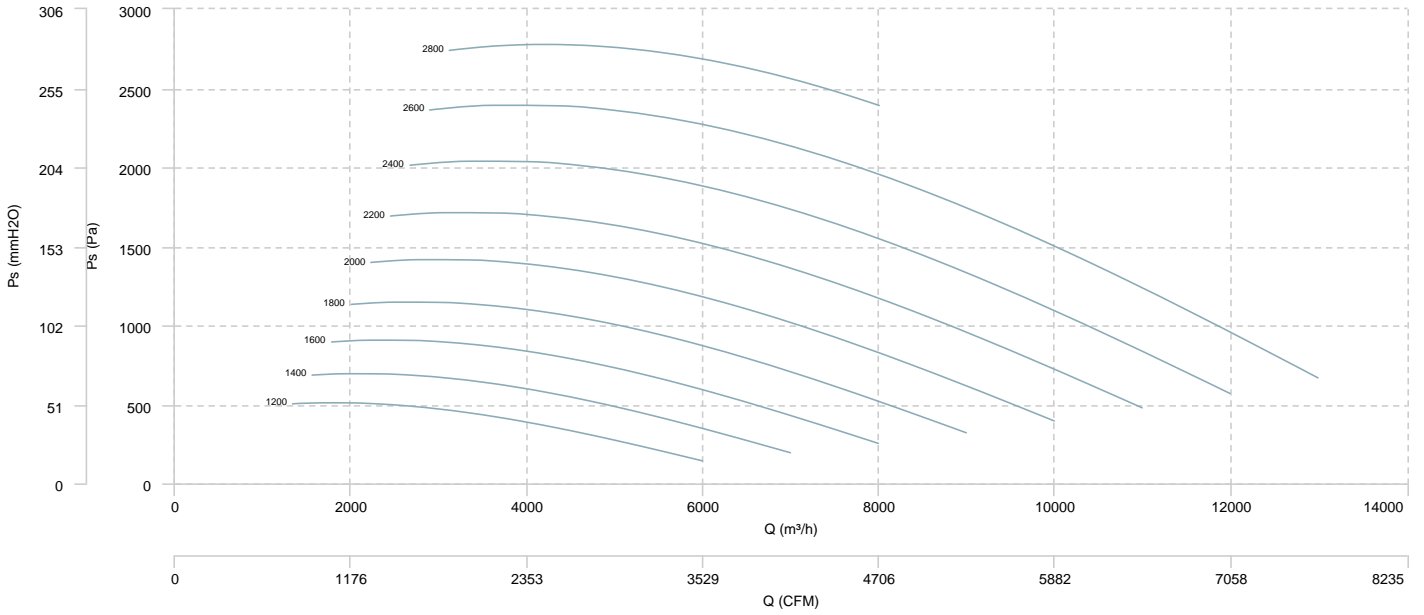


AIR FLOW - MECHANICAL POWER

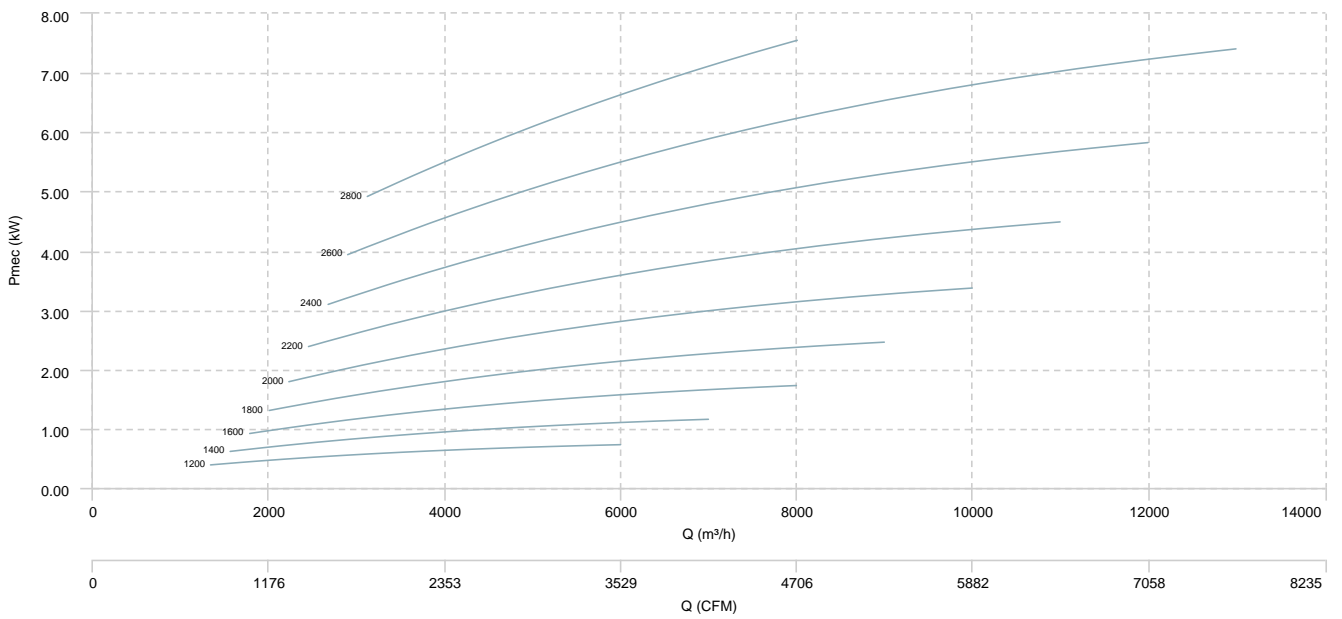


BOX BSTB 500

AIR FLOW - PRESSURE

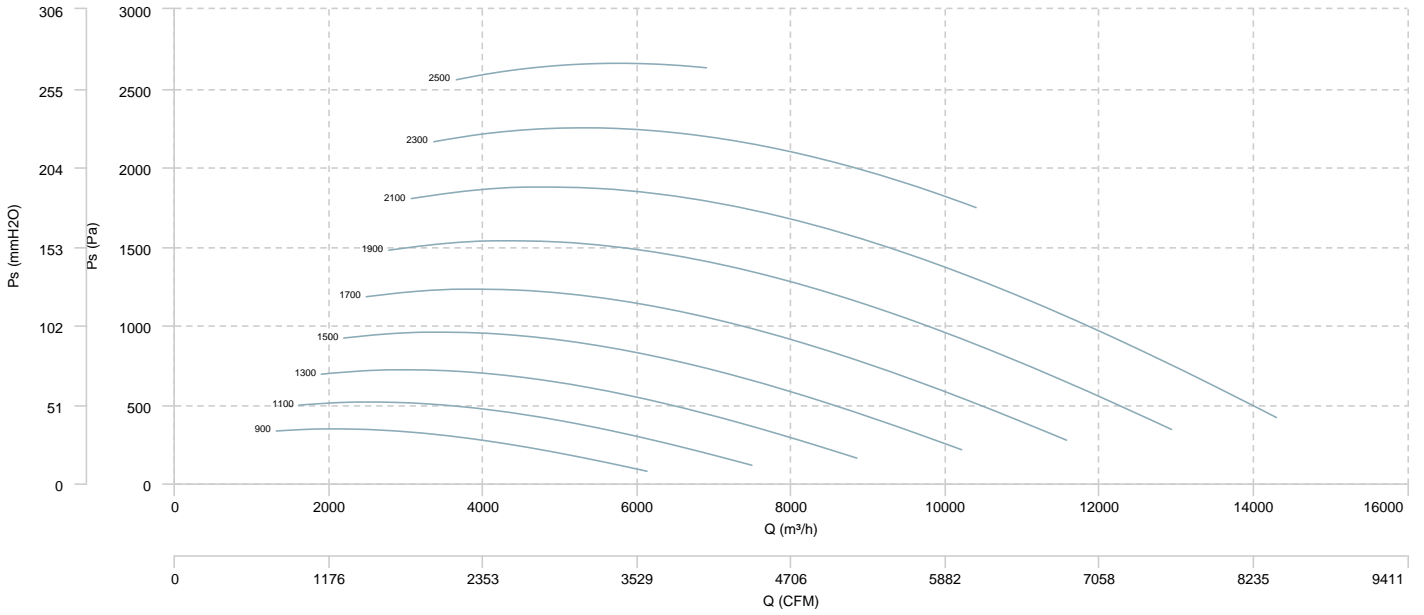


AIR FLOW - MECHANICAL POWER

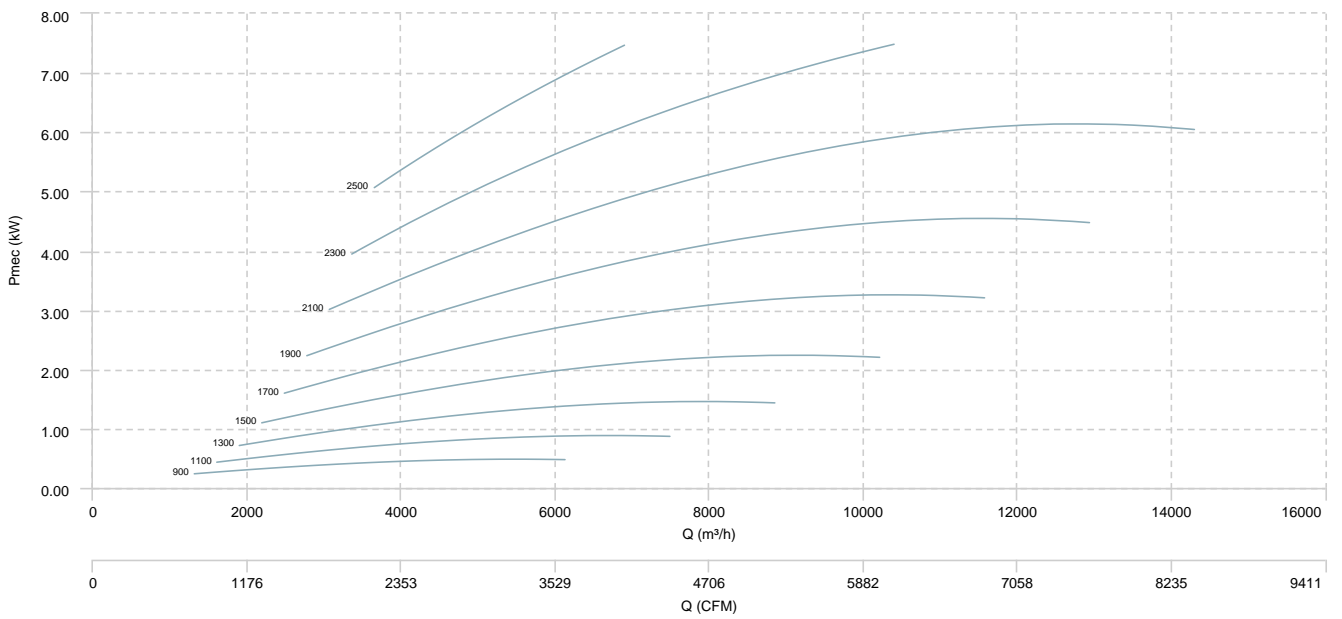


BOX BSTB 560

AIR FLOW - PRESSURE

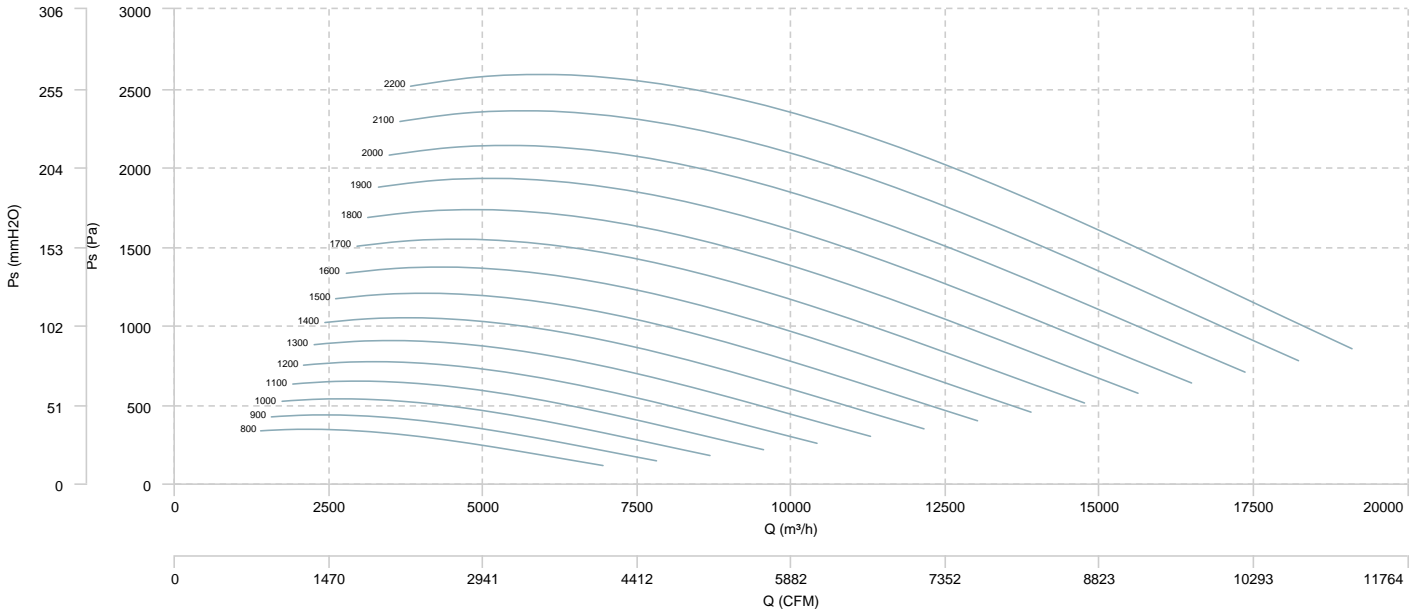


AIR FLOW - MECHANICAL POWER

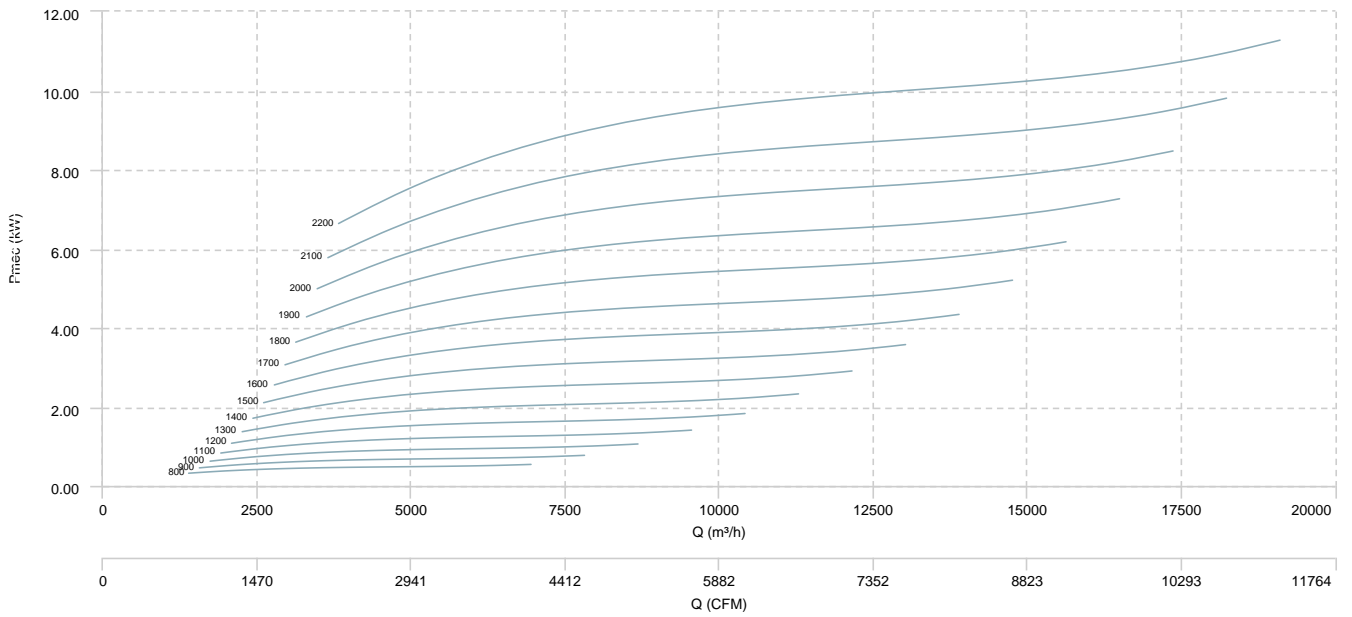


BOX BSTB 630

AIR FLOW - PRESSURE

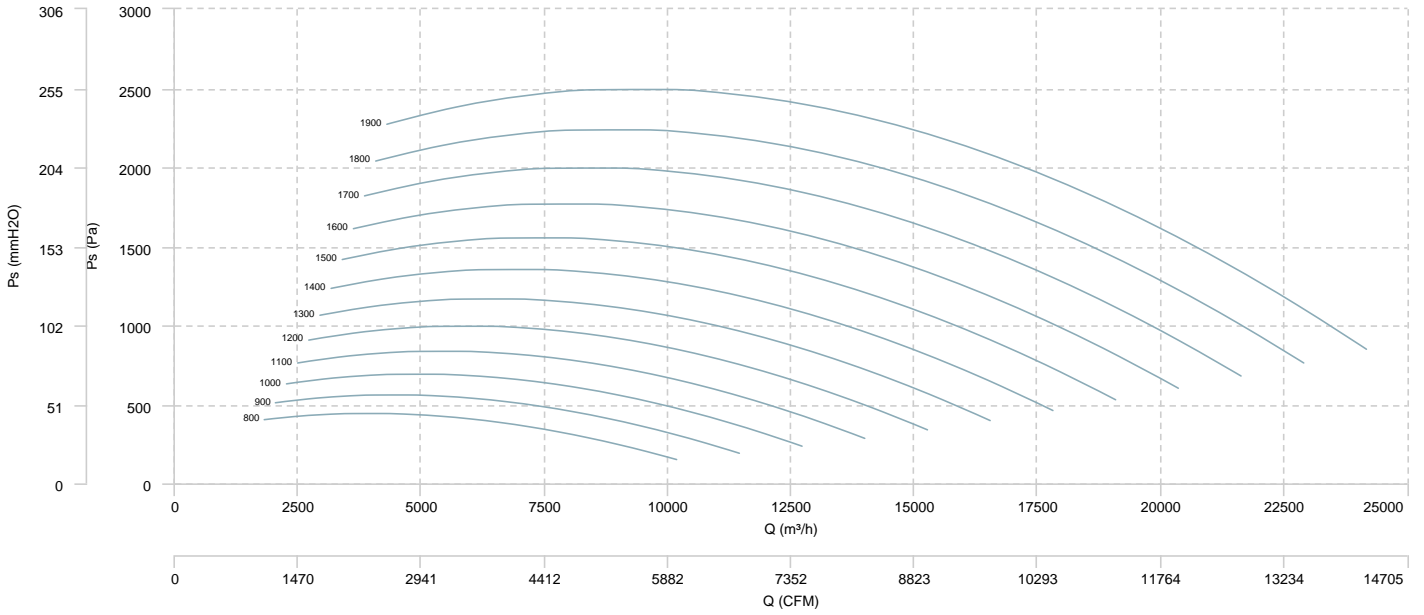


AIR FLOW - MECHANICAL POWER

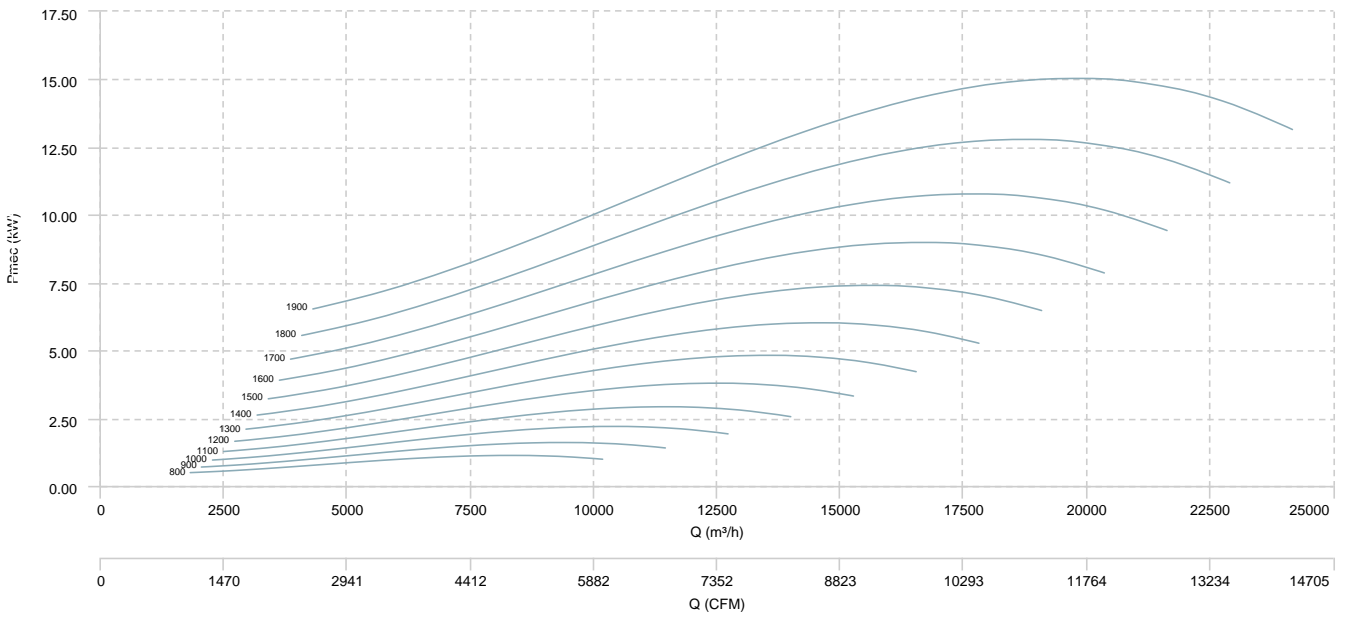


BOX BSTB 710

AIR FLOW - PRESSURE

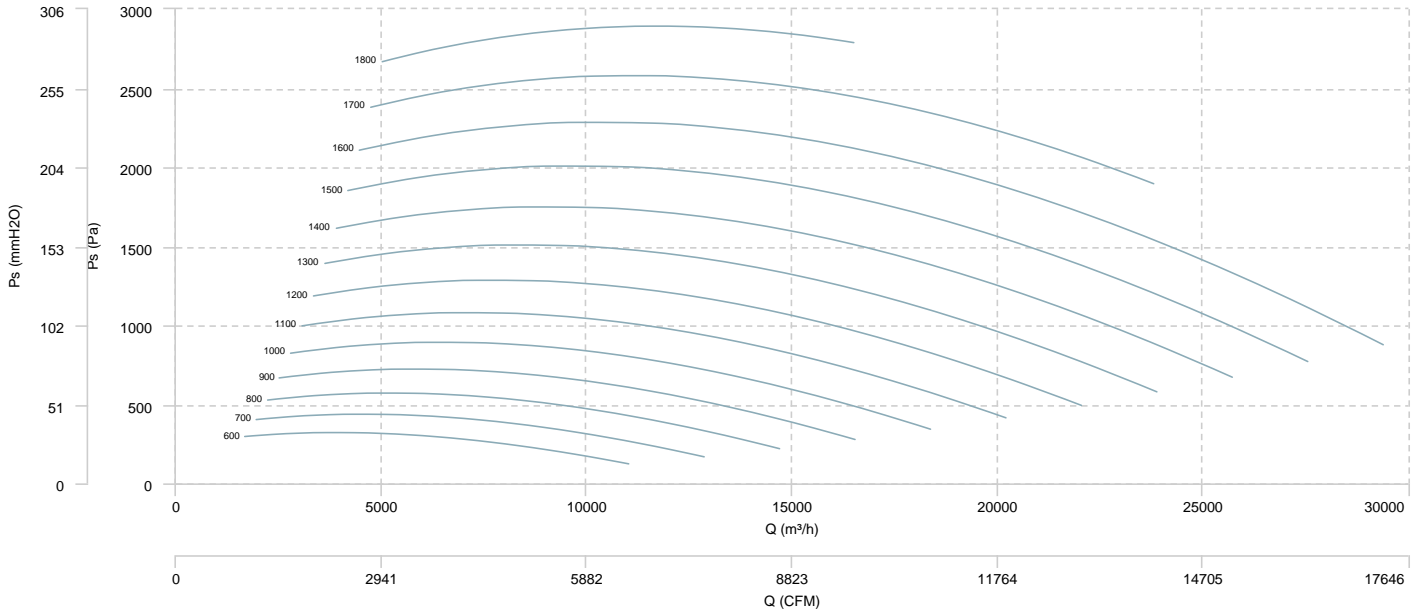

AIR FLOW - MECHANICAL POWER

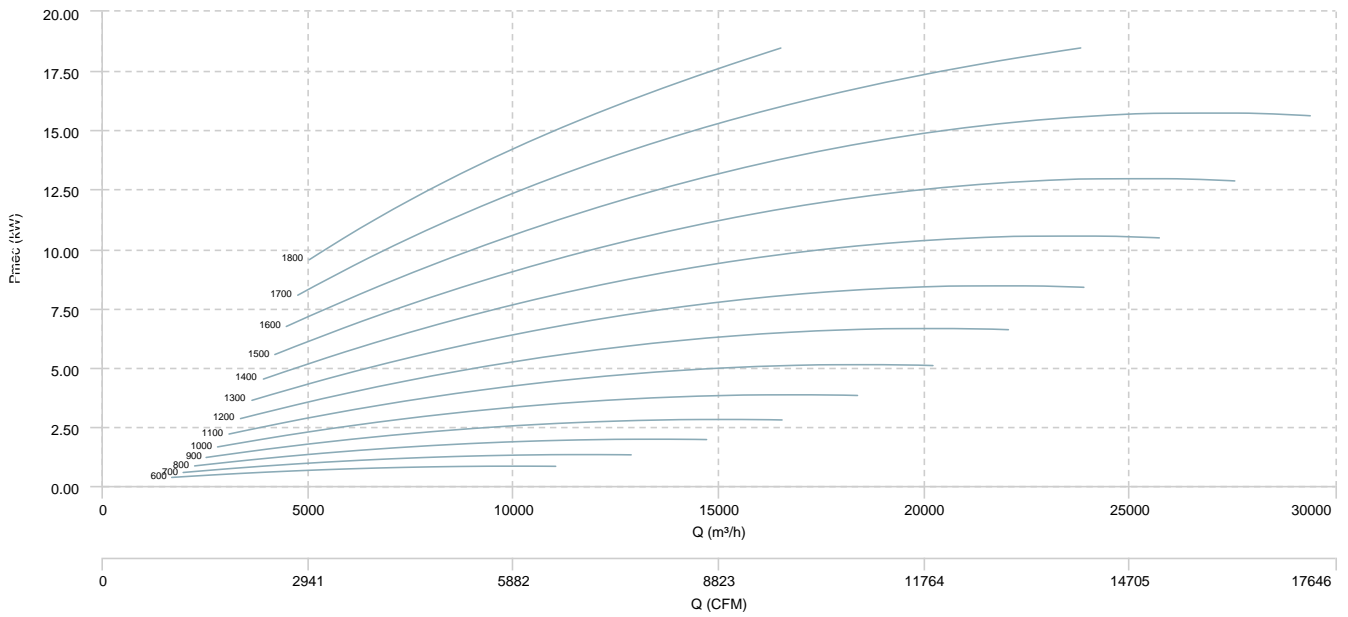

Sound data

Sound / 4 poles

Sound power Lw dB (A)										
Model		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Total
BOX BSTB 355 (1300)	Inlet	47	58	69	70	70	69	60	49	75
	Radiated	42	53	64	65	65	64	55	44	70
BOX BSTB 400 (1200)	Inlet	54	62	73	74	77	74	65	53	80
	Radiated	49	57	68	69	72	69	60	48	75
BOX BSTB 450 (1200)	Inlet	57	69	79	80	81	78	69	56	85
	Radiated	52	64	74	75	76	73	64	51	80
BOX BSTB 500 (900)	Inlet	49	65	72	74	77	73	66	52	80
	Radiated	44	60	67	69	72	68	61	47	75
BOX BSTB 560 (800)	Inlet	49	67	73	75	79	74	67	54	82
	Radiated	44	62	68	70	74	69	62	49	77
BOX BSTB 630 (800)	Inlet	51	68	75	77	81	77	69	57	84
	Radiated	47	64	71	73	77	73	65	53	80
BOX BSTB 710 (600)	Inlet	46	63	70	73	76	71	64	49	80
	Radiated	42	59	66	69	72	67	60	45	75

Notes:

* To calculate the sound power level at different rpm from those indicated above, use the following formula:

$$Lw\ dB(A)_{rpmA} = Lw\ dB(A)_{rpmB} + 52.5 \cdot \log_{10} \frac{rpmA}{rpmB}$$

erp data

ERP	
Fan type	Centrifugal fan backward blades with casing
Installation category	A
Efficiency category	Static
The fan has to be installed with FSC	No

ERP / 4 poles

Model	Motor power (kW)	Maximum efficiency point data						
		Max. efficiency (%)	Efficiency grade (N) (N)	Air Flow (m³/h)	Ps (Pa)	Pabs (kW)	speed (rpm)	Specific ratio
BOX BSTB 355	0,37	46,32	61,60	1.832,81	321,70	0,35	1300	1,00
BOX BSTB 355	0,37	50,55	64,27	2.114,78	428,32	0,49	1500	1,00
BOX BSTB 355	0,55	56,55	69,07	2.396,74	550,14	0,64	1700	1,00
BOX BSTB 355	0,75	57,91	69,02	2.678,71	687,21	0,88	1900	1,00
BOX BSTB 355	1,10	59,36	69,21	2.960,73	839,48	1,15	2100	1,00
BOX BSTB 355	1,50	60,21	68,88	3.242,75	1.006,99	1,49	2300	1,00
BOX BSTB 355	2,20	62,30	69,98	3.524,73	1.189,68	1,85	2500	1,00
BOX BSTB 355	2,20	60,68	67,20	3.806,60	1.387,71	2,40	2700	1,00
BOX BSTB 355	3	61,49	67,09	4.088,64	1.600,74	2,93	2900	1,00
BOX BSTB 400	0,55	56,61	70,77	2.574,62	347,50	0,45	1200	1,00
BOX BSTB 400	0,75	59,20	71,44	3.003,83	472,97	0,68	1400	1,00
BOX BSTB 400	1,10	60,84	71,39	3.433,17	617,77	0,99	1600	1,00
BOX BSTB 400	1,50	61,78	70,78	3.861,99	781,88	1,39	1800	1,00
BOX BSTB 400	2,20	63,94	71,66	4.291,13	965,30	1,84	2000	1,00
BOX BSTB 400	2,20	63,12	69,47	4.720,22	1.167,96	2,48	2200	1,00
BOX BSTB 400	3	63,45	68,63	5.149,34	1.390	3,21	2400	1,00
BOX BSTB 400	4	63,55	67,65	5.578,58	1.631,31	4,07	2600	1,00
BOX BSTB 400	4	61,21	64,81	4.922	2.034,17	4,54	2800	1,00
BOX BSTB 450	0,75	58,03	70,09	3.305,44	448,94	0,71	1200	1,00
BOX BSTB 450	1,10	59,61	69,69	3.856,29	611,06	1,10	1400	1,00
BOX BSTB 450	1,50	60,41	68,72	4.407,19	798,09	1,62	1600	1,00
BOX BSTB 450	2,20	62,17	68,99	4.958,12	1.010,09	2,24	1800	1,00
BOX BSTB 450	3	62,13	67,52	5.509,14	1.246,99	3,07	2000	1,00
BOX BSTB 450	4	62,61	66,72	6.060,13	1.508,90	4,06	2200	1,00
BOX BSTB 450	5,50	63,17	66,14	6.610,78	1.795,71	5,22	2400	1,00
BOX BSTB 450	7,50	63,45	65,34	7.161,87	2.107,48	6,61	2600	1,00
BOX BSTB 450	7,50	63,51	64,39	7.713,21	2.444,02	8,25	2800	1,00
BOX BSTB 500	1,10	56,37	69,96	3.263,72	315,32	0,51	900	1,00

Model	Motor power (kW)	Maximum efficiency point data						
		Max. efficiency (%)	Efficiency grade (N) (N)	Air Flow (m ³ /h)	Ps (Pa)	Pabs (kW)	speed (rpm)	Specific ratio
BOX BSTB 500	1,10	59,52	70,61	3.989,04	471,04	0,88	1100	1,00
BOX BSTB 500	1,50	60,68	69,57	4.714,24	657,86	1,42	1300	1,00
BOX BSTB 500	2,20	62,56	69,63	5.439,54	875,86	2,12	1500	1,00
BOX BSTB 500	3	62,34	67,68	6.164,77	1.125,01	3,10	1700	1,00
BOX BSTB 500	4	62,73	66,58	6.890,28	1.405,28	4,30	1900	1,00
BOX BSTB 500	5,50	63,39	65,92	7.615,02	1.716,81	5,75	2100	1,00
BOX BSTB 500	7,50	64,16	65,51	8.359,56	2.056,98	7,44	2300	1,00
BOX BSTB 500	7,50	61,11	61,99	6.900	2.630,02	8,25	2500	1,00
BOX BSTB 560	1,50	55,94	68,79	4.372,75	276	0,60	800	1,00
BOX BSTB 560	1,50	58,44	69,89	4.919,38	349,30	0,81	900	1,00
BOX BSTB 560	1,50	59,79	69,90	5.465,86	431,25	1,09	1000	1,00
BOX BSTB 560	1,50	60,21	69,05	6.012,65	521,80	1,44	1100	1,00
BOX BSTB 560	2,20	62,30	70,10	6.559,25	621	1,81	1200	1,00
BOX BSTB 560	2,20	61,77	68,44	7.105,89	728,82	2,32	1300	1,00
BOX BSTB 560	3	61,90	67,56	7.652,43	845,26	2,89	1400	1,00
BOX BSTB 560	4	62,48	67,24	8.199,27	970,31	3,52	1500	1,00
BOX BSTB 560	4	62,23	66,09	8.745,83	1.104,04	4,29	1600	1,00
BOX BSTB 560	5,50	62,88	65,96	9.291,96	1.246,27	5,09	1700	1,00
BOX BSTB 560	5,50	62,87	65,17	9.838,92	1.397,22	6,04	1800	1,00
BOX BSTB 560	7,50	63,75	65,37	10.385,27	1.556,76	7,01	1900	1,00
BOX BSTB 560	11	64,29	65,24	10.931,83	1.725	8,11	2000	1,00
BOX BSTB 560	11	64,33	64,62	11.478,41	1.901,84	9,38	2100	1,00
BOX BSTB 560	11	64,25	64,23	12.025,22	2.087,28	10,79	2200	1,00
BOX BSTB 630	2,20	60,37	70,59	5.393,32	424,81	1,06	800	1,00
BOX BSTB 630	2,20	62,75	71,52	6.067,13	537,66	1,46	900	1,00
BOX BSTB 630	2,20	63,19	70,55	6.741,56	663,77	1,99	1000	1,00
BOX BSTB 630	3	62,93	68,97	7.415,94	803,18	2,66	1100	1,00
BOX BSTB 630	4	63,56	68,45	8.089,91	955,82	3,42	1200	1,00
BOX BSTB 630	4	63,30	67,07	8.763,77	1.121,74	4,38	1300	1,00
BOX BSTB 630	5,50	63,99	66,80	9.437,63	1.301,02	5,40	1400	1,00
BOX BSTB 630	7,50	64,93	66,86	10.112,78	1.493,40	6,55	1500	1,00
BOX BSTB 630	7,50	64,72	65,75	10.785,77	1.699,34	7,98	1600	1,00
BOX BSTB 630	11	65,45	65,70	11.460	1.918,28	9,45	1700	1,00
BOX BSTB 630	11	65,36	65,30	12.135,52	2.150,63	11,24	1800	1,00
BOX BSTB 630	15	65,99	65,76	12.809,69	2.396,19	13,09	1900	1,00
BOX BSTB 710	3	57,19	67,97	6.785,64	284,91	0,94	600	1,00
BOX BSTB 710	3	60,79	69,72	7.916,61	387,80	1,41	700	1,00
BOX BSTB 710	3	62,56	69,80	9.047,65	506,52	2,04	800	1,00

Model	Motor power (kW)	Maximum efficiency point data						
		Max. efficiency (%)	Efficiency grade (N) (N)	Air Flow (m ³ /h)	Ps (Pa)	Pabs (kW)	speed (rpm)	Specific ratio
BOX BSTB 710	3	63	68,67	10.178,43	641,07	2,89	900	1,00
BOX BSTB 710	4	63,49	67,75	11.309,40	791,44	3,93	1000	1,00
BOX BSTB 710	5,50	64,02	67	12.440,24	957,65	5,19	1100	1,00
BOX BSTB 710	7,50	64,94	66,80	13.571,35	1.139,68	6,65	1200	1,00
BOX BSTB 710	11	65,46	66,26	14.702,32	1.337,57	8,38	1300	1,00
BOX BSTB 710	11	65,43	65,45	15.833,29	1.551,24	10,48	1400	1,00
BOX BSTB 710	15	66	65,80	16.964,22	1.780,65	12,77	1500	1,00
BOX BSTB 710	15	65,87	65,45	18.095,27	2.026,04	15,53	1600	1,00
BOX BSTB 710	18,50	66,28	65,68	19.268,97	2.284,30	18,42	1700	1,00
BOX BSTB 710	18,50	64,22	63,53	16.500	2.789,40	19,92	1800	1,00